


25 ks na vodič / 75 ks na vedení



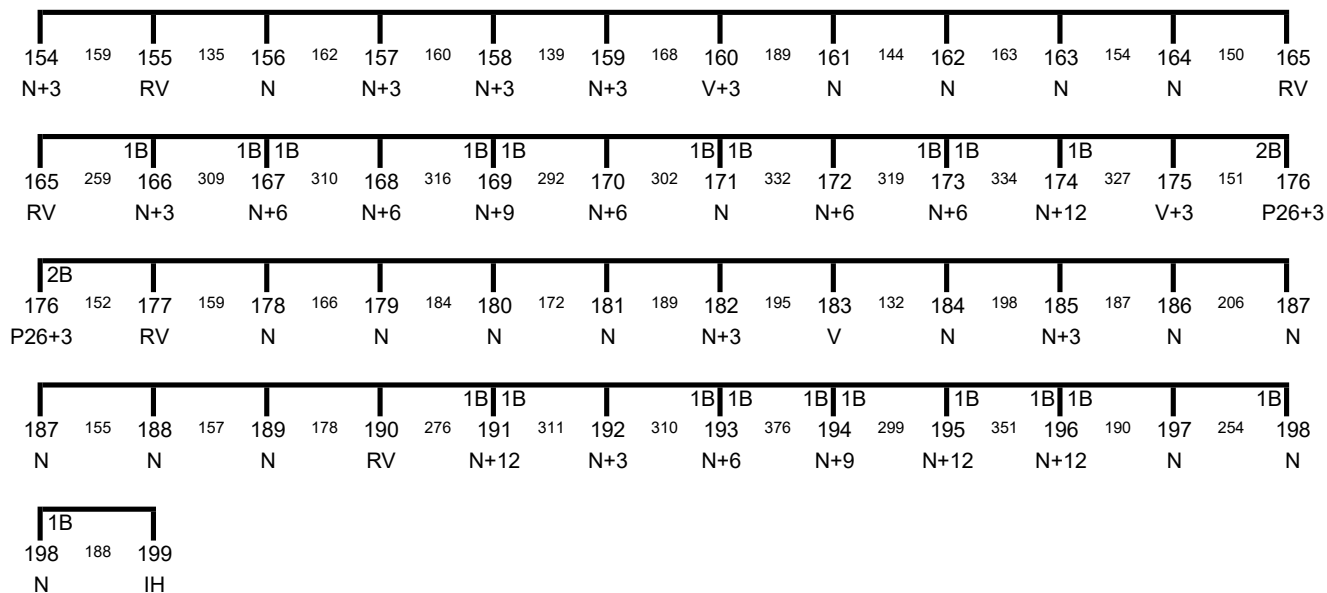


23.10.2017

customer: EDWIN, s.r.o.  
project: 110 kV OHTL V5522


conductor: 185-AL1/30-ST1A (Ø19,0) 243-AL1/39-ST1A (Ø21,8) EDS (10°C): max. 43,1 N/mm<sup>2</sup>

#### Suspension:

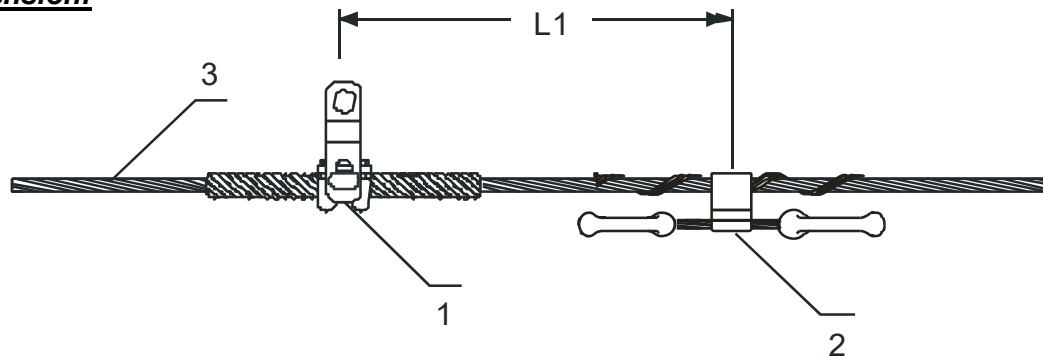

1 - suspension clamp:	104203KB	104206KB	L1 = 0,8 m
2 - damper:	B161001A01	B161002A02	
3 - conductor:	184-AL1/30-ST1A	243-AL1/39-ST1A	

#### Tension:

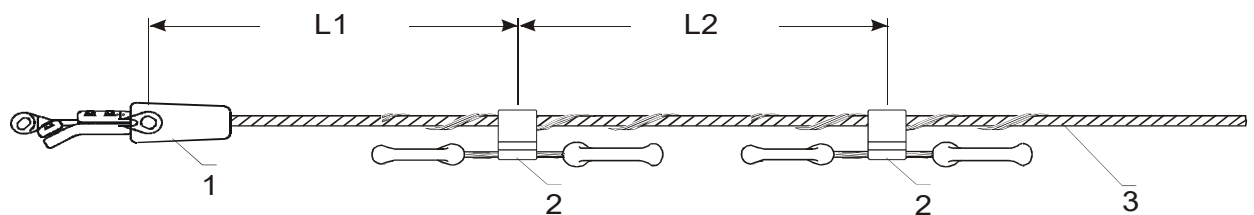

1 - tension clamp:	B118203A01	B118223A01	L1 = 0,7 m
2 - damper:	B161001A01	B161002A02	L2 = 0,8 m
3 - conductor:	184-AL1/30-ST1A	243-AL1/39-ST1A	

The damper locations are only valid for the damper type numbers shown in the drawing. They are not transferable to other damper types. Ignoring this warning may cause damage of conductor or damper.